IDENTIFICATION DEPOT

SPECIFICATION SHEET

Adhesive Pipe Markers

Product Specifications

Identification Depot adhesive markers are constructed of durable premium grade, outdoor vinyl to withstand exposure to harsh elements. The permanent, pressure sensitive adhesive will adhere to most clean/dry surfaces and stay there for many years. All markers are constructed for easy removal from the liner to speed up installation. Markers comply with ASME A13.1-2020 "Scheme for the Identification of Piping Systems" (see reverse side) when used with Arrow Banding Tape or Individual Arrow Markers.

Standard Adhesive Pipe Marker and Arrow Combinations

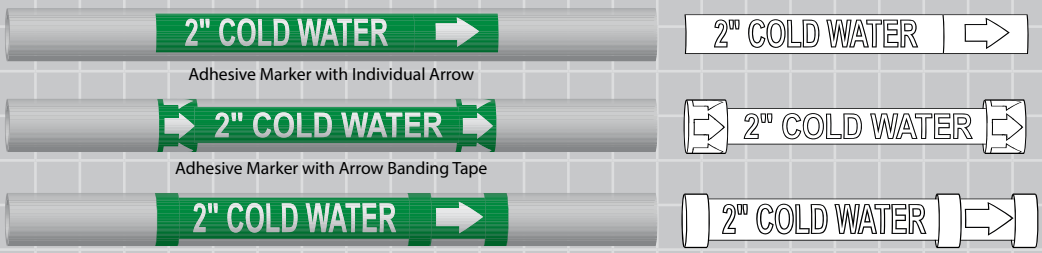

Adhesive Marker with Individual Arrow

Adhesive Marker with Arrow Banding Tape

Adhesive Marker with Banding Tape and Individual Arrow

Style	Pipe Outer Diameter (Includes Insulation)		Length of Color Field		Letter Height	
A	.7" - 1.3"	18 - 33mm	9"	229mm	.5"	13mm
B	1.4" - 2.4"	34 - 61mm	9"	229mm	.7"	19mm
C	2.5" - 6.7"	62 - 170mm	14"	356mm	1.3"	32mm
D	6.8" - 10"	171 - 254mm	24"	610mm	2.5"	64mm
E	Over 10"	Over 254mm	32"	813mm	3.5"	89mm

Physical Properties

Standards Met	ANSI/ASME A13.1-2020 "Scheme for Identification of Piping Systems" ANSI Z535.1 "Safety Color Code"	
Available Colors	See second page	
Standard Legends	See second page	
Customization	Customize legends, marker color, letter color	
Installation Instructions	Apply to clean dry surface	
Installation Temperature	Above 50° F	
Service Temperature	-40°F to 176° F (-40°C to 82.22°C)	
Water Resistance	Good, Product has passed submersion tests	
Finish	High Gloss	
Material Properties	4 Mil vinyl with pressure sensitive adhesive backing	
Adhesive Properties	Aggressive permanent acrylic adhesive	
	Stainless Steel: 54 oz/in (594 N/m)	**Acrylic:** 56 oz/in (616 N/m)
	Glass: 53 oz/in (599 N/m)	**Polypropylene:** 51 oz/in (561 N/m)
	Expected Shear: 5 hours	**Tack:** gm (740)
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish	
Storage Stability	2 years stored at 70°F (21°C) and 50% RH	
Indoor/Outdoor Durability	4 to 6 years	
Abrasion Resistance	Good	
Chemical Resistance	Resistant to Acids, Alkalis and Salts	
Equivalent To	Marking Services MS-900, Seton Opti-Code, Craftmark Duramark Pipe Markers, Brady Pipe Markers	

Project

DATE _____ / _____ / _____ JOB _____

MM DD YYYY

CONTRACTOR NAME _____